

1RND 10 1 SRCT CARTRIDGE COUNT CARTRIDGE LENGTH INLET/ OUTLET

1.5" TC VENT/PRESSURE GAUGE

The SRCT and SRVT Sanitary Cartridge Vessels offer the aesthetics and operational durability of stainless steel at affordable prices. The SRCT's innovative design ensures optimal cleanability in critical areas and can accomodate either 10", 20" or 30" cartridges in a single cartridge housing and 20", 30" or 40" filter cartridges in a multi-cartridge vessel.

SRCT filters are designed specifically for liquid filtration in the food and beverage industry, offering microbiological safety, corrosion resistance and durability.

SRVT filters offer the same innovative design with a 100 PSI maximum operating pressure at 200°F.

SRCT SINGLE CARTRIDGE				
Maximum Operating Pressure: 145 psi (67°F)				
Electropolished finish ensures optimal cleana	bility in critical areas			
Stainless steel legs				
Sterilization using in-line steam, autoclave or	hot water			
Fitted for code 7 filter cartridge				
SRCT MULTI-CARTRIDGE				
Maximum Differential Pressure: 25 PSID				
Filter Cartridge Life: 0-25 PSID				
Electropolished finish ensures optimal cleana	bility in critical areas			
Stainless steel legs				
Sterilization using in-line steam, autoclave or	hot water			
Fitted for code 7 and code 6 filter cartridges				
SRVT SINGLE & MULTI-CARTRIDGE				
Maximum Operating Pressure: 100 psi (200°F)				
316 Stainless steel				
Removable cartridge plates for cleaning				
Bleeder valve vents and drains				
Silicone Gaskets				
Holds 226/Fin (C7) Cartridges				
PERFORMANCE CHARACTERISTICS - SINGLE	CARTRIDGE			
0.6 0.0 0.5 0.6 0.6 0.6 0.6 0.70.7 _0				10″ 1μ ••••••••nominal
~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~ ~		•		•••••••nominal
0.2	****			30″ 1µ ••••••
🗑 0.1 —				
0	4	6	8	10
	WATER FLOW F	ATE (GPM)		


NEED ELEMENTS FOR YOUR VESSEL?

The following are most commonly used with the SRCT and SRVT line:

CLARITY MEMBRANE—PAGES 4-15 CLARITY DUAL-PLEAT-PAGES 16-17 CLARITY DEPTH—PAGES 18-39 CLARITY SPECIALTY—PAGES 40-69 As always, discuss your options with your local sales representative to find the best fit for your application.





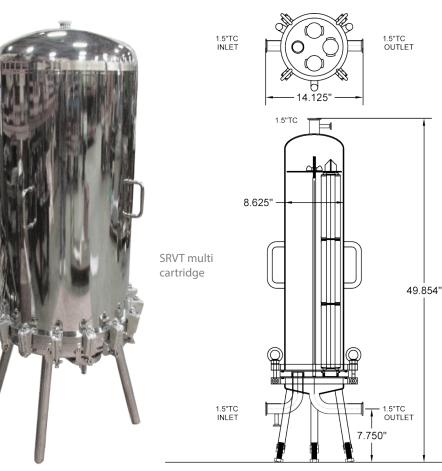



SRCT single cartridge

С

CONSTRUCTION MATERIALS

ALSO FITS 1.5" TC CLAMPS

## **ORDER OPTIONS - SRCT** VESSEL SRCT Strainrite Sanitary Cartridge Vessel **CARTRIDGE COUNT** 1RND 1-round cartridge 3RND 5RND 8RND 3-round cartridges 5-round cartridges

8RND 12RND	8-round cartridges 12-round cartridges			
18RND 24RND	18-round cartridges 24-round cartridges			
30RND	30-round cartridges			
ELEMENT LENGTH				
*10, 20, 30, **40				
*1-cartridge house only **Not available with 1-cartridge housing				
INLET/OUTLET				
1TC 2TC	1" Tri-Clover* 2" Tri-Clover			
3TC	2" Tri-Clover			
	*1-cartridge house only			
CONSTRUCTION MATERIALS				
С	316L Stainless Steel			
END-CAP				
C6 C7	Flat/226 Fin/226			

## **ORDER OPTIONS - SRVT**

VESSEL			
SRVT	Strainrite Sanitary Cartridge Vessel - 100 psi		
CARTRIDGE COUNT			
1RND 3RND 5RND 7RND 12RND	1-round cartridge 3-round cartridges 5-round cartridges 7-round cartridges 12-round cartridges		
ELEMENT LENGTH			
*10, *20, 30			
	*1-cartridge house only		
INLET/OUTLET			
1TC 1.5TC 2TC	*1" Tri-Clover **1.5" Tri-Clover **2" Tri-Clover *1-cartridge house only **3,5,7-cartridge house only **12-cartridge house only		
CONSTRUCTION MATERIALS			
С	316L Stainless Steel		
END-CAP			
C7	Fin/226		

This is not a comprehensive list. We can build your vessel to suit your specifications. Call one of our customer service representatives for pricing and availability.

## SRCT1RND201CC6