




Strainrite's **Bev-Rite** pleated membrane filters are specifically engineered to provide a barrier to beverage spoiling micro-organisms. The **Bev-Rite** bio-reduction filter incorporates a highly asymmetric polyethersulfone membrane within our exclusive pleat support configuration, creating one of the industry's most rugged bacteria removal filters.

This exceptionally robust filter design means filter performance will remain effective after multiple steam sterilization cycles. Every **Bev-Rite** filter is integrity tested and flushed with high purity water to assure product performance and purity.

- ▶ **ABSOLUTE-RATED AND INTEGRITY TESTED MEMBRANE PROVIDES RELIABLE, CONSISTENT AND REPEATABLE FILTRATE TO ENSURE MICROBIOLOGICAL STABILITY**
- ▶ **LOW PRESSURE DROPS YIELD HIGHER FLOW RATES AND REDUCED PROCESSING TIME**
- ▶ **NON-FIBER SHEDDING POLYPROPYLENE SUPPORT MATERIALS ELIMINATE FIBER MIGRATION**
- ▶ **MAXIMUM PLEAT DESIGN FOR GREATER SURFACE AREA, ENSURING LONGER SERVICE LIFE, FEWER CHANGE OUTS AND REDUCED OPERATING COSTS**
- ▶ **100% THERMALLY BONDED CONSTRUCTION**
- ▶ **HIGH STRENGTH DESIGN ALLOWING FOR EXTENDED USE AND MULTI AUTOCLAVE AND HOT WATER SANITIZATION CYCLES**
- ▶ **316 STAINLESS STEEL INSERT STANDARD**
- ▶ **ALL MATERIALS ARE LISTED IN TITLE 21 OF THE US CODE OF FEDERAL REGULATIONS 177-182**
- ▶ **COMPONENT MATERIALS MEET THE BIOSAFETY CRITERIA OF THE USP REACTIVITY TEST FOR CLASS VI PLASTICS**
- ▶ **COMPONENT MATERIALS MEET THE "NON-FIBER RELEASING" CRITERIA AS DEFINED IN 21 CFR 210.3 (B) (6)**
- ▶ **BEV-RITE CARTRIDGES ARE MANUFACTURED IN A FACILITY WHOSE QUALITY MANAGEMENT SYSTEM IS APPROVED BY AN ACCREDITED REGISTERING BODY TO THE ISO 9001:2008 STANDARD**
- ▶ **BEV-RITE CARTRIDGES ARE 100% INTEGRITY TESTED AND DI FLUSHED**




# ORDER GUIDE



**BVR0.8-10PPC1S**

<b>ABSOLUTE RATED RETENTION</b>			
0.2, 0.45, 0.65, 0.8			
<b>MAXIMUM DIFFERENTIAL PRESSURE</b>			
Forward:		Reverse:	
75 psid (5.1 bar) @ 75°F (24°C)		50 psid (3.4 bar) @ 75°F (24°C)	
40 psid (2.8 bar) @ 180°F (82°C)			
<b>MAXIMUM OPERATING TEMPERATURE</b>			
180°F (82°C) Continuous Duty			
<b>STERILIZATION</b>			
Cartridge can be sterilized via steam or Autoclave: 20 times at 275°F (135°C) Cartridge may be sanitized in place with common sanitizing agents, contact factory for chemical compatibility			
<b>PACKAGING ECONOMY</b>			
Bulk packaging in case quantities to reduce material disposal: 5 inch - 48 per carton   10 inch - 24 per carton   20 inch - 12 per carton   30 inch - 12 per carton   40 inch - 9 per carton			
<b>FILTER MEDIA</b>	<b>END CAPS</b>	<b>PLEAT SUPPORT MATERIAL</b>	<b>CAGE/CORE</b>
Polyethersulfone	Polypropylene	Polypropylene	Polypropylene
<b>SEALS</b>		<b>REINFORCING RING</b>	
EPDM   Silicone		316 Stainless Steel	
<b>CONSTRUCTION METHOD</b>		<b>OUTSIDE DIAMETER</b>	<b>APPROXIMATE SURFACE AREA</b>
Thermal Bond		2.7" (6.87cm)	7 square feet per 10" equivalent
<b>LENGTHS</b>			
5 inch (12.7 cm)   10 inch (25.4 cm)   20 inch (50.8 cm)   30 inch (76.2 cm)   40 inch (102 cm)			
<b>INTEGRITY TEST VALUES</b>			
<b>PORE SIZE</b>	<b>BUBBLE POINT</b>	<b>TEST PRESSURE</b>	
BVR0.2	50 psig in water	40 psig	
BVR0.45	38 psig in water	30 psig	
BVR0.65	26 psig in water	23 psig	
BVR0.8	16 psig in water	20 psig	
<b>PERFORMANCE CHARACTERISTICS</b>			

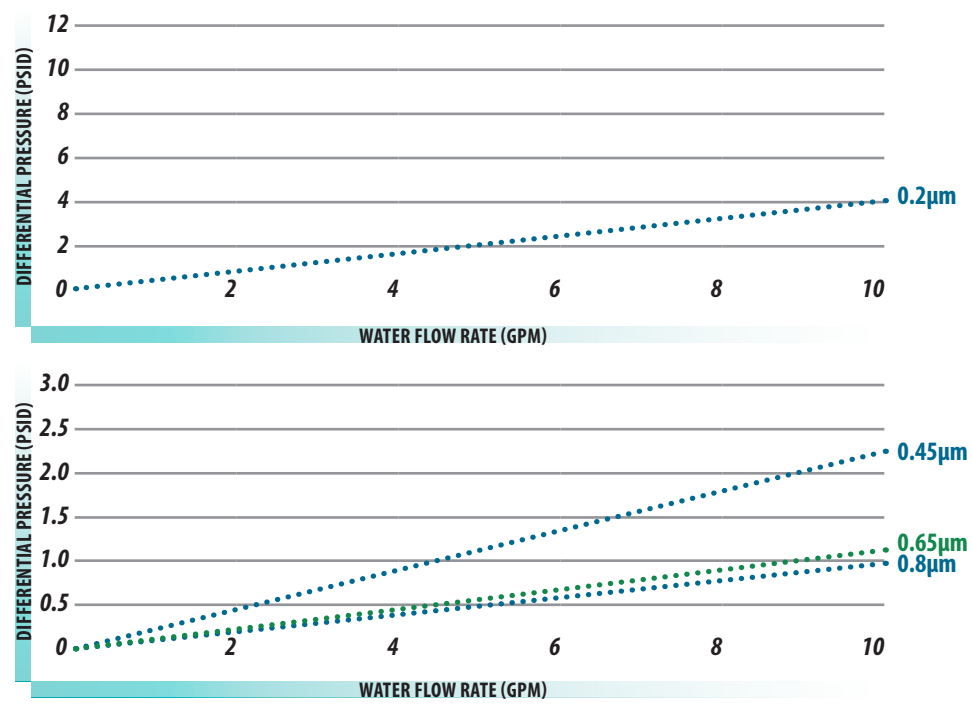

## ORDER OPTIONS

CARTRIDGE	
BVR	Bev-Rite
MICRON RATINGS	
0.2, 0.45, 0.65, 0.8	
CARTRIDGE LENGTH	
5, 10, 20, 30, 40	
PLEAT SUPPORT	
PP	Polypropylene
END CAP CONFIGURATIONS	
C1	Double Open Ends
C3	Flat/222
C6	Flat/226
C7	Fin/226
C8	Fin/222
GASKET / O-RING MATERIAL	
S E	Silicone EPDM