

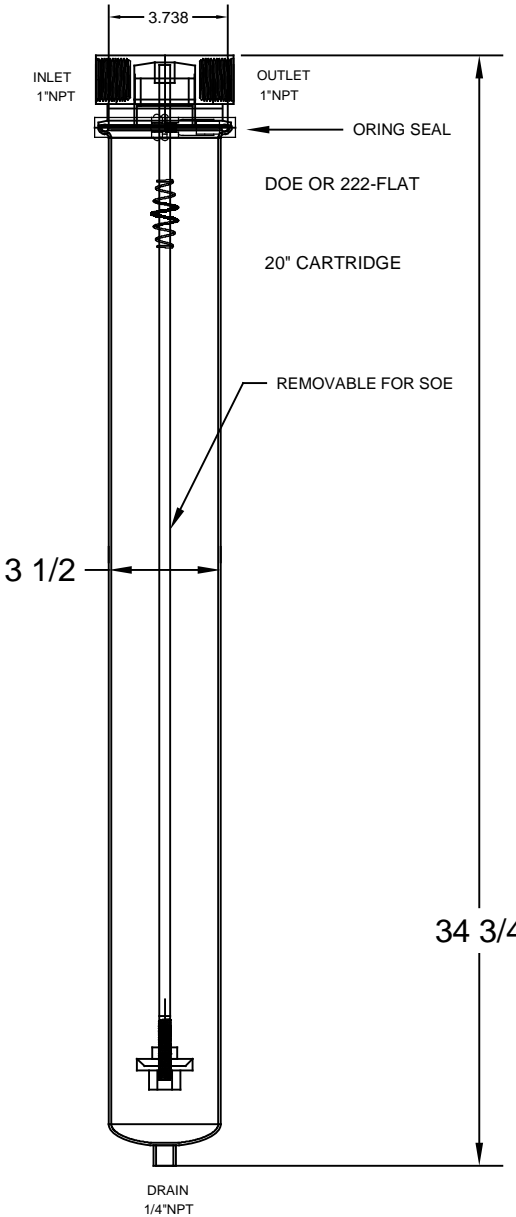


CARTRIDGE VESSEL  
 FILTER CARTRIDGE LIFE 0-20 PSID  
 MAXIMUM DIFFERENTIAL PRESSURE 25 PSID  
 FLOW RANGE 30" CTK 1-14 GPM , MAXIMUM FLOW RATE 20 GPM WATER

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVAL
0	new	xx	xx

HOLDS (1) DOE OR 222/FLAT (C1,C3)  
 DESIGN PRESSURE 100PSI @ 300F  
 NON-CODE MILD SERVICE  
 (PSV) PRESSURE SAFETY VALVE NOT SUPPLIED

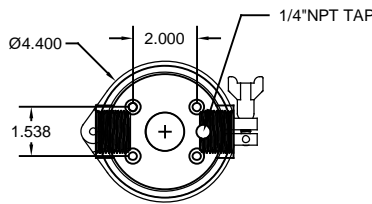

106516  
 SRVC-B1-301V

EST. SHIPPING WEIGHTS  
 30" 15 LBS

<p><b>THIS REPRODUCTION IS A PROPRIETARY DESIGN AND CONFIDENTIAL INFORMATION OF UF STRAINRITE INC. AND IS LOANED SUBJECT TO THE CONDITIONS THAT: (1) IT SHALL BE USED OR CAUSED TO BE USED FOR RECORD AND REFERENCE PURPOSES; (2) IT SHALL NOT BE USED OR CAUSED TO BE USED FOR PROCUREMENT IN ANY WAY PREJUDICIAL TO UF STRAINRITE INC. INTERESTS; (3) IT SHALL NOT BE REPRODUCED OR COPIED IN WHOLE OR IN PART; AND (4) IT SHALL NOT BE DISCLOSED AS GENERAL OR SPECIFIC INFORMATION WITHOUT EXPRESSED CONSENT IN WRITING SIGNED BY AN AUTHORIZED REPRESENTATIVE OF UF STRAINRITE INC.</b></p>	<p>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ARE AS FOLLOWS:          FRACTION E 1/8 ANGLES E 10°          .XX = E .020 .XXX = E .XX</p>	<p><b>SRVC-B1</b></p>		
	<p>MATERIAL:  <b>STAINLESS</b></p>	<p>DRAWN BY: DCB          DATE: 2-15-16</p>	<p><b>STRAINRITE INC</b>          65 First Flight Drive          Auburn Maine          (207) 777-3100</p>	
		<p>APPROVAL:          DWG #: -</p>	<p>SCALE: xx 0</p>	<p>SHT. 1 OF 1 C</p>