ORDER GUIDE





The SRVC Value Design Cartridge Vessels provide economical filtration of a wide variety of liquids in a lightweight, externally polished stainless steel design, with features including a swing bolt secured, quick opening cover and an internal positive pressure cartridge alignment and sealing plate.

The SRVC vessels accommodate either a single 10" or 20" long, double open end (DOE) or 222 single open end (SOE) filter cartridge. These vessels are manufactured from polished and passivated 304 stainless steel and rated for 100 psi for single cartridge and 150 psi for multi-cartridge. For added corrosion resistance, all cover bolt and leg mounting hardware is made from stainless steel as well.

SRVC SINGLE & MULTI-CARTRIDGE		
Maximum Allowable Temperature: 300°F (149°C)		
Convertible design allows for the use of both DOE and SOE cartridges		
Standard Seals: Fluorocarbon (other material options available)		
Single 0-ring design closure assures quick, positive cover sealing		
Code Design: Non-ASME		
Vent and drain connections		
Polished exterior & pickle passivate interior /exterior for enhanced corrosion resistance		
SRVC SINGLE CARTRIDGE		
Maximum Allowable Pressure: 100 psi		
Clamped o-ring closure seal provides quick and positive seal		
In-line 1" FNPT threaded pipe connections for easy installation		
Head mounting kit included		
SRVC MULTI-CARTRIDGE		
Maximum Allowable Pressure: 150 psi		
Swing bolts for fast and easy opening and closing of cover		
Swing bolted o-ring closure seal provides quick and positive seal and easy access to the vessel interior and filter cartridges		
Standard threaded FNPT vent & drains		
Standard stainless steel cartridge support and sealing hardware		



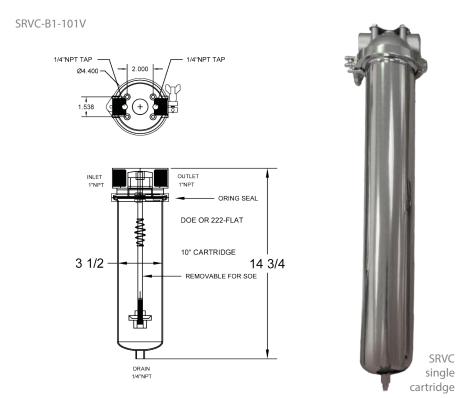

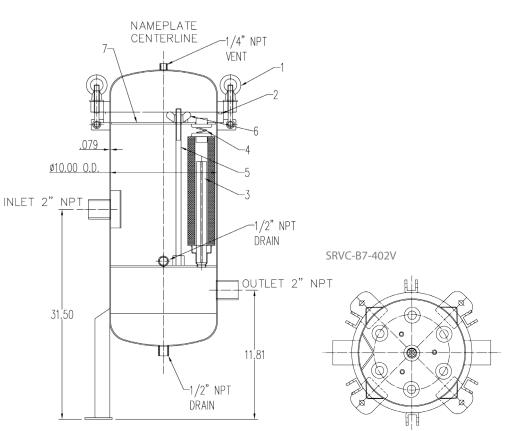

www.strainrite.com | 800-487-3136

ORDER OPTIONS

ORDER OPTIONS		
VESSEL		
SRVC	Strainrite Value Design Cartridge Vessel Series	
MATERIAL		
В	304 Stainless Steel	
CARTRIDGE COUNT		
1*, 5, 7, 11, 19 *Single-round housing accepts C1 (DOE)		
and C3 (flat/222) cartridges only		
*10, **20, 30, ***40 *1-cartridge house only "Not available with 7, 11 or 19-cartridge housing "Not available with 1-cartridge housing		
INLET/OUTLET		
1 2 2F 3F 4F	*1" NPT **2" NPT ***2" RFF ****3" RFF ****4" RFF	
*1-cartridge house only **5-cartridge 30" / 7-cartridge 30 or 40" only **5-cartridge 20, 30 or 40" / 7-cartridge 30" or 40" only ****11-cartridge 30 or 40" only *****19-cartridge 30 or 40" only		
0-RING		
V B E	Fluorocarbon *Buna N *EPDM	
	*Special request only	

This is not a comprehensive list. We can build your vessel to suit your specifications. Call one of our customer service representatives for pricing and availability.

NEED ELEMENTS FOR YOUR VESSEL?

132

CLARITY DEPTH—PAGES 18-39 CLARITY SPECIALTY—PAGES 40-69 As always, discuss your options with your local sales representative to find the best fit for your application