


The SRVC Value Design Cartridge Vessels provide economical filtration of a wide variety of liquids in a lightweight, externally polished stainless steel design, with features including a swing bolt secured, quick opening cover and an internal positive pressure cartridge alignment and sealing plate.

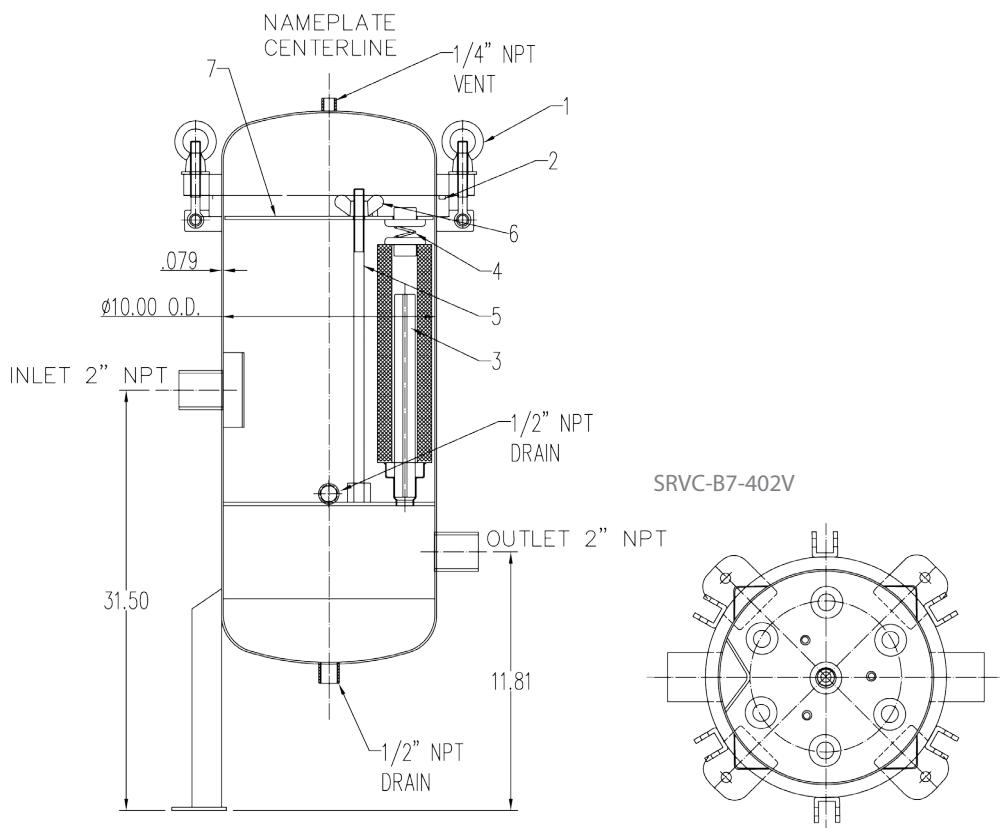
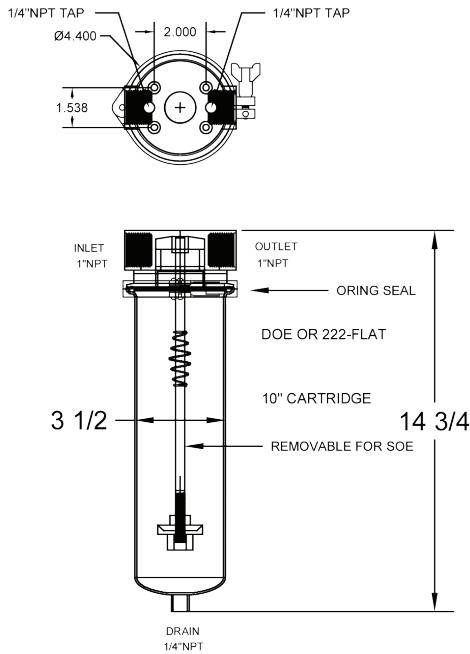
The SRVC vessels accommodate either a single 10" or 20" long, double open end (DOE) or 222 single open end (SOE) filter cartridge. These vessels are manufactured from polished and passivated 304 stainless steel and rated for 100 psi. For added corrosion resistance, all cover bolt and leg mounting hardware is made from stainless steel as well.

SRVC SINGLE & MULTI-CARTRIDGE	
Maximum Allowable Pressure: 100 psi	Maximum Allowable Temperature: 300°F (149°C)
Convertible design allows for the use of both DOE and SOE cartridges	
Standard Seals: Fluorocarbon (other material options available)	
Single O-ring design closure assures quick, positive cover sealing	
Code Design: Non-ASME	
Vent and drain connections	
Polished exterior & pickle passivate interior/exterior for enhanced corrosion resistance	
SRVC SINGLE CARTRIDGE	
Clamped o-ring closure seal provides quick and positive seal	
In-line 1" FNPT threaded pipe connections for easy installation	
Head mounting kit included	
SRVC MULTI-CARTRIDGE	
Swing bolts for fast and easy opening and closing of cover	
Swing bolted o-ring closure seal provides quick and positive seal and easy access to the vessel interior and filter cartridges	
Standard threaded FNPT vent & drains	
Standard stainless steel cartridge support and sealing hardware	



**ORDER GUIDE**

SRVC-B1-101V

**ORDER OPTIONS**

VESSEL	
SRVC	Strainrite Value Design Cartridge Vessel Series
MATERIAL	
B	304 Stainless Steel
CARTRIDGE COUNT	
	1*, 5, 7, 11, 19
<small>*Single-round housing accepts C1 (DOE) and C3 (flat/222) cartridges only</small>	
ELEMENT LENGTH	
	*10, **20, 30, ***40
<small>*1-cartridge house only **Not available with 7, 11 or 19-cartridge housing ***Not available with 1-cartridge housing</small>	
INLET/OUTLET	
1	*1" NPT
2	**2" NPT
2F	**2" RFF
3F	****3" RFF
4F	****4" RFF
<small>*1-cartridge house only **5-cartridge 30" / 7-cartridge 30 or 40" only ***5-cartridge 20, 30 or 40" / 7-cartridge 30" or 40" only ****11-cartridge 30 or 40" only *****19-cartridge 30 or 40" only</small>	
O-RING	
V	Fluorocarbon
B	*Buna N
E	*EPDM
<small>*Special request only</small>	

This is not a comprehensive list. We can build your vessel to suit your specifications. Call one of our customer service representatives for pricing and availability.